


# Cone Térmico HSK E25 - Mono 3°

## Categorias

- Mono 3°

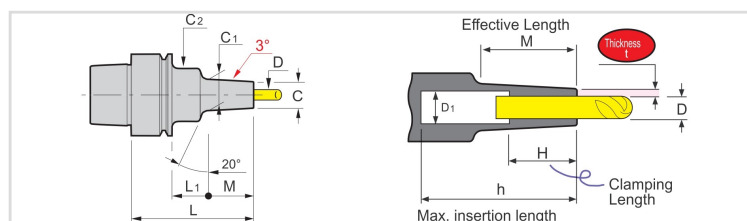

| Ref.            | Descrição        | ØD    | ØC    | Thickness | L  | M  | L1 | ØC1  | ØC2 | ØD1 |
|-----------------|------------------|-------|-------|-----------|----|----|----|------|-----|-----|
| 930118203035M17 | E25-SLSA3-35     | 3     | 6     | 1.5       | 35 | 17 | 8  | 7.8  | 18  | 4   |
| 930118203050M32 | E25-SLSA3-50     | 3     | 6     | 1.5       | 50 | 32 | 8  | 9.4  | 18  | 4   |
| 930118103035M17 | E25-SLRA3-35     | 3     | 7.5   | 2.25      | 35 | 17 | 8  | 9.3  | 18  | 4   |
| 930118231035M17 | E25-SLSA3.175-35 | 3.175 | 6.175 | 1.5       | 35 | 17 | 8  | 8    | 18  | 4   |
| 930118232050M32 | E25-SLSA3.175-50 | 3.175 | 6.175 | 1.5       | 50 | 32 | 8  | 9.6  | 18  | 4   |
| 930118204035M17 | E25-SLSA4-35     | 4     | 7     | 1.5       | 35 | 17 | 8  | 8.8  | 18  | 4.3 |
| 930118204050M32 | E25-SLSA4-50     | 4     | 7     | 1.5       | 50 | 32 | 8  | 10.4 | 18  | 4.3 |
| 930118104035M17 | E25-SLRA4-35     | 4     | 10    | 3         | 35 | 17 | 8  | 11.8 | 18  | 4.3 |
| 930118205035M17 | E25-SLSA5-35     | 5     | 8     | 1.5       | 35 | 17 | 8  | 9.8  | 18  | 5.6 |
| 930118206035M17 | E25-SLSA6-35     | 6     | 9     | 1.5       | 35 | 17 | 8  | 10.8 | 18  | 6.6 |
| 930118206050M32 | E25-SLSA6-50     | 6     | 9     | 1.5       | 50 | 32 | 8  | 12.4 | 18  | 6.6 |
| 930118106035M17 | E25-SLRA6-35     | 6     | 12    | 3         | 35 | 17 | 8  | 13.8 | 18  | 6.6 |