


## CONE TÉRMICO CURVE BT40 cv

## Categorias

- Curve

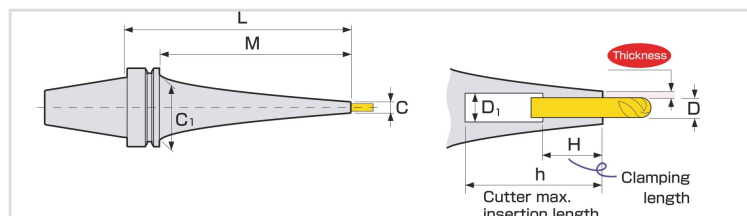

Ref.	Descrição	ØD	ØC	Thickness	L	M	ØC1	ØD1	H	h
930107SLSA04090	BT40-SLSA4-90 cv	4	7	1.5	90	63	53	5	12	125
930107SLSA04120	BT40-SLSA4-120 cv	4	7	1.5	120	93	53	5	12	155
930107SLSA04150	BT40-SLSA4-150 cv	4	7	1.5	150	123	53	5	12	185
930107SLSA04180	BT40-SLSA4-180 cv	4	7	1.5	180	153	53	5	12	215
930107SLSA04210	BT40-SLSA4-210 cv	4	7	1.5	210	183	53	5	12	245
930107SLSA04240	BT40-SLSA4-240 cv	4	7	1.5	240	213	53	5	12	275
930107SLRA04120	BT40-SLRA4-120 cv	4	10	3	120	93	53	5	12	155
930107SLRA04150	BT40-SLRA4-150 cv	4	10	3	150	123	53	5	12	185
930107SLRA04180	BT40-SLRA4-180 cv	4	10	3	180	153	53	5	12	215
930107SLRA04210	BT40-SLRA4-210 cv	4	10	3	210	183	53	5	12	245
930107SLSA06090	BT40-SLSA6-90 cv	6	9	1.5	90	63	53	7	18	125
930107SLSA06120	BT40-SLSA6-120 cv	6	9	1.5	120	93	53	7	18	155
930107SLSA06150	BT40-SLSA6-150 cv	6	9	1.5	150	123	53	7	18	185
930107SLSA06180	BT40-SLSA6-180 cv	6	9	1.5	180	153	53	7	18	215
930107SLSA06210	BT40-SLSA6-210 cv	6	9	1.5	210	183	53	7	18	245
930107SLSA06240	BT40-SLSA6-240 cv	6	9	1.5	240	213	53	7	18	275
930107SLRA06090	BT40-SLRA6-90 cv	6	13	3.5	90	63	53	7	18	125
930107SLRA06120	BT40-SLRA6-120 cv	6	13	3.5	120	93	53	7	18	155
930107SLRA06150	BT40-SLRA6-150 cv	6	13	3.5	150	123	53	7	18	185
930107SLRA06180	BT40-SLRA6-180 cv	6	13	3.5	180	153	53	7	18	215
930107SLRA06210	BT40-SLRA6-210 cv	6	13	3.5	210	183	53	7	18	245
930107SLFA06090	BT40-SLFA6-90 cv	6	13	3.5	90	63	53	7	18	125
930107SLFA06120	BT40-SLFA6-120 cv	6	13	3.5	120	93	53	7	18	155
930107SLFA06150	BT40-SLFA6-150 cv	6	13	3.5	150	123	53	7	18	185
930107SLFA06180	BT40-SLFA6-180 cv	6	13	3.5	180	153	53	7	18	215
930107SLFA06210	BT40-SLFA6-210 cv	6	13	3.5	210	183	53	7	18	245

Ref.	Descrição	ØD	ØC	Thickness	L	M	ØC1	ØD1	H	h
930107SLSA08090	BT40-SLSA8-90 cv	8	11	1.5	90	63	53	9	24	125
930107SLSA08120	BT40-SLSA8-120 cv	8	11	1.5	120	93	53	9	24	155
930107SLSA08150	BT40-SLSA8-150 cv	8	11	1.5	150	123	53	9	24	185
930107SLSA08180	BT40-SLSA8-180 cv	8	11	1.5	180	153	53	9	24	215
930107SLSA08210	BT40-SLSA8-210 cv	8	11	1.5	210	183	53	9	24	245
930107SLSA08240	BT40-SLSA8-240 cv	8	11	1.5	240	213	53	9	24	275
930107SLRA08090	BT40-SLRA8-90 cv	8	16	4	90	63	53	9	24	125
930107SLRA08120	BT40-SLRA8-120 cv	8	16	4	120	93	53	9	24	155
930107SLRA08150	BT40-SLRA8-150 cv	8	16	4	150	123	53	9	24	185
930107SLRA08180	BT40-SLRA8-180 cv	8	16	4	180	153	53	9	24	215
930107SLRA08210	BT40-SLRA8-210 cv	8	16	4	210	183	53	9	24	245
930107SLFA08090	BT40-SLFA8-90 cv	8	16	4	90	63	53	9	24	125
930107SLFA08120	BT40-SLFA8-120 cv	8	16	4	120	93	53	9	24	155
930107SLFA08150	BT40-SLFA8-150 cv	8	16	4	150	123	53	9	24	185
930107SLFA08180	BT40-SLFA8-180 cv	8	16	4	180	153	53	9	24	215
930107SLFA08210	BT40-SLFA8-210 cv	8	16	4	210	183	53	9	24	245
930107SLSA10090	BT40-SLSA10-90 cv	10	13	1.5	90	63	53	11	30	125
930107SLSA10120	BT40-SLSA10-120 cv	10	13	1.5	120	93	53	11	30	155
930107SLSA10150	BT40-SLSA10-150 cv	10	13	1.5	150	123	53	11	30	185
930107SLSA10180	BT40-SLSA10-180 cv	10	13	1.5	180	153	53	11	30	215
930107SLSA10210	BT40-SLSA10-210 cv	10	13	1.5	210	183	53	11	30	245
930107SLSA10240	BT40-SLSA10-240 cv	10	13	1.5	240	213	53	11	30	275
930107SLRA10090	BT40-SLRA10-90 cv	10	19	4.5	90	63	53	11	30	125
930107SLRA10120	BT40-SLRA10-120 cv	10	19	4.5	120	93	53	11	30	155
930107SLRA10150	BT40-SLRA10-150 cv	10	19	4.5	150	123	53	11	30	185
930107SLRA10180	BT40-SLRA10-180 cv	10	19	4.5	180	153	53	11	30	215
930107SLRA10210	BT40-SLRA10-210 cv	10	19	4.5	210	183	53	11	30	245
930107SLFA10090	BT40-SLFA10-90 cv	10	19	4.5	90	63	53	11	30	125
930107SLFA10120	BT40-SLFA10-120 cv	10	19	4.5	120	93	53	11	30	155
930107SLFA10150	BT40-SLFA10-150 cv	10	19	4.5	150	123	53	11	30	185
930107SLFA10180	BT40-SLFA10-180 cv	10	19	4.5	180	153	53	11	30	215
930107SLFA10210	BT40-SLFA10-210 cv	10	19	4.5	210	183	53	11	30	245
930107SLSA12090	BT40-SLSA12-90 cv	12	15	1.5	90	63	53	14	30	125
930107SLSA12120	BT40-SLSA12-120 cv	12	15	1.5	120	93	53	13	30	155
930107SLSA12150	BT40-SLSA12-150 cv	12	15	1.5	150	123	53	13	30	185
930107SLSA12180	BT40-SLSA12-180 cv	12	15	1.5	180	153	53	13	30	215
930107SLSA12210	BT40-SLSA12-210 cv	12	15	1.5	210	183	53	13	30	245
930107SLSA12240	BT40-SLSA12-240 cv	12	15	1.5	240	213	53	13	30	275
930107SLRA12090	BT40-SLRA12-90 cv	12	22	5	90	63	53	14	30	125
930107SLRA12120	BT40-SLRA12-120 cv	12	22	5	120	93	53	14	30	155
930107SLRA12150	BT40-SLRA12-150 cv	12	22	5	150	123	53	13	30	185
930107SLRA12180	BT40-SLRA12-180 cv	12	22	5	180	153	53	13	30	215
930107SLRA12210	BT40-SLRA12-210 cv	12	22	5	210	183	53	13	30	245

Ref.	Descrição	ØD	ØC	Thickness	L	M	ØC1	ØD1	H	h
930107SLFA12090	BT40-SLFA12-90 cv	12	22	5	90	63	53	14	30	125
930107SLFA12120	BT40-SLFA12-120 cv	12	22	5	120	93	53	14	30	155
930107SLFA12150	BT40-SLFA12-150 cv	12	22	5	150	123	53	13	30	185
930107SLFA12180	BT40-SLFA12-180 cv	12	22	5	180	153	53	13	30	215
930107SLFA12210	BT40-SLFA12-210 cv	12	22	5	210	183	53	13	30	245
930107SLSB16090	BT40-SLSB16-90 cv	16	21	2.5	90	63	53	17	32	100
930107SLSB16120	BT40-SLSB16-120 cv	16	21	2.5	120	93	53	17	32	130
930107SLSB16150	BT40-SLSB16-150 cv	16	21	2.5	150	123	53	17	32	160
930107SLSB16180	BT40-SLSB16-180 cv	16	21	2.5	180	153	53	17	32	190
930107SLSB16210	BT40-SLSB16-210 cv	16	21	2.5	210	183	53	17	32	220
930107SLSB16240	BT40-SLSB16-240 cv	16	21	2.5	240	213	53	17	32	250
930107SLSB20090	BT40-SLSB20-90 cv	20	26	3	90	63	50.5	21	40	100
930107SLSB20120	BT40-SLSB20-120 cv	20	26	3	120	93	53	21	40	130
930107SLSB20150	BT40-SLSB20-150 cv	20	26	3	150	123	53	21	40	160
930107SLSB20180	BT40-SLSB20-180 cv	20	26	3	180	153	53	21	40	190
930107SLSB20210	BT40-SLSB20-210 cv	20	26	3	210	183	53	21	40	220
930107SLSB20240	BT40-SLSB20-240 cv	20	26	3	240	213	53	21	40	250