


Cone Térmico BT30 - Mono 3°

Categorias

- Mono 3°

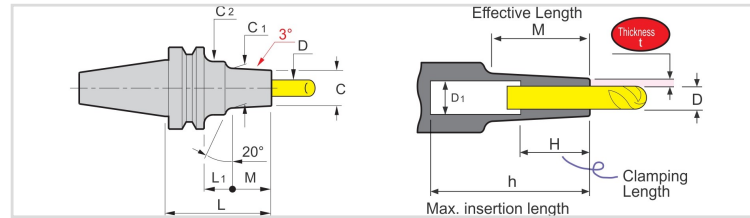

Ref.	Descrição	ØD	ØC1	ØC2	Thickness	L	M	L1	ØD1
930111203075M22	BT30-SLSA3-75-M22	3	8.3	25	1.5	75	22	31	4
930111203095M42	BT30-SLSA3-95-M42	3	10.4	25	1.5	95	42	31	4
930111203120M67	BT30-SLSA3-120-M67	3	13	25	1.5	120	67	31	4
930111103075M22	BT30-SLRA3-75-M22	3	9.8	25	2.25	75	22	31	4
930111232075M22	BT30-SLSA3.175-75-M22	3.175	8.5	25	1.5	75	22	31	4
930111233095M42	BT30-SLSA3.175-95-M42	3.175	10.6	25	1.5	95	42	31	4
930111204075M22	BT30-SLSA4-75-M22	4	9.3	25	1.5	75	22	31	5
930111204095M42	BT30-SLSA4-95-M42	4	11.4	25	1.5	95	42	31	5
930111204120M67	BT30-SLSA4-120-M67	4	14	25	1.5	120	67	31	5
930111104075M22	BT30-SLRA4-75-M22	4	12.3	25	3	75	22	31	5
930111206075M22	BT30-SLSA6-75-M22	6	11.3	25	1.5	75	22	31	7
930111206095M42	BT30-SLSA6-95-M42	6	13.4	25	1.5	95	42	31	7
930111206120M67	BT30-SLSA6-120-M67	6	16	25	1.5	120	67	31	7
930111106075M22	BT30-SLRA6-75-M22	6	14.3	25	3	75	22	31	7
930111108075M22	BT30-SLRA8-75-M22	8	16.3	25	3	75	22	31	9
930111110075M22	BT30-SLRA10-75-M22	10	18.3	25	3	75	22	31	11
930111112075M22	BT30-SLRA12-75-M22	12	22.3	25	4	75	22	31	13
930111116060M22	BT30-SLRA16-60-M22	16	28.3	34	5	60	22	16	16.6
930111120065M22	BT30-SLRA20-65-M22	20	34.3	40	6	65	22	21	20.6